








Fitting for 1 top-running wooden door up to 16 kg (35 lbs.), with groove mounted running track. With soft and self closing mechanism. Design Forslide.

Product highlights


-  **Aesthetics** Single door solution without visible guide or guide groove in cabinet base
-  **Productivity** Efficient thanks to tool-less door installation as well as easy, intuitive adjustment

Technical specifications

-  Max. 16 kg (35 lbs.)
-  Max. 1400 mm (4'7 1/8")
-  Max. 1000 mm (3'3 3/8")
-  16–25 mm (5/8" to 31/32")

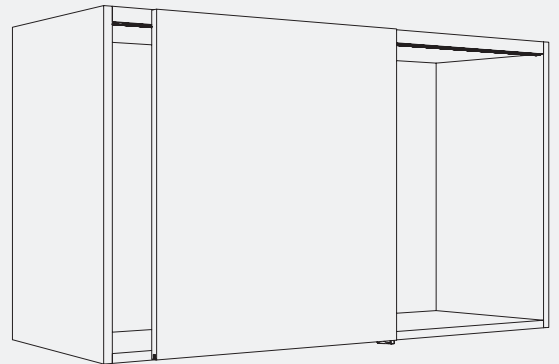






Installation examples

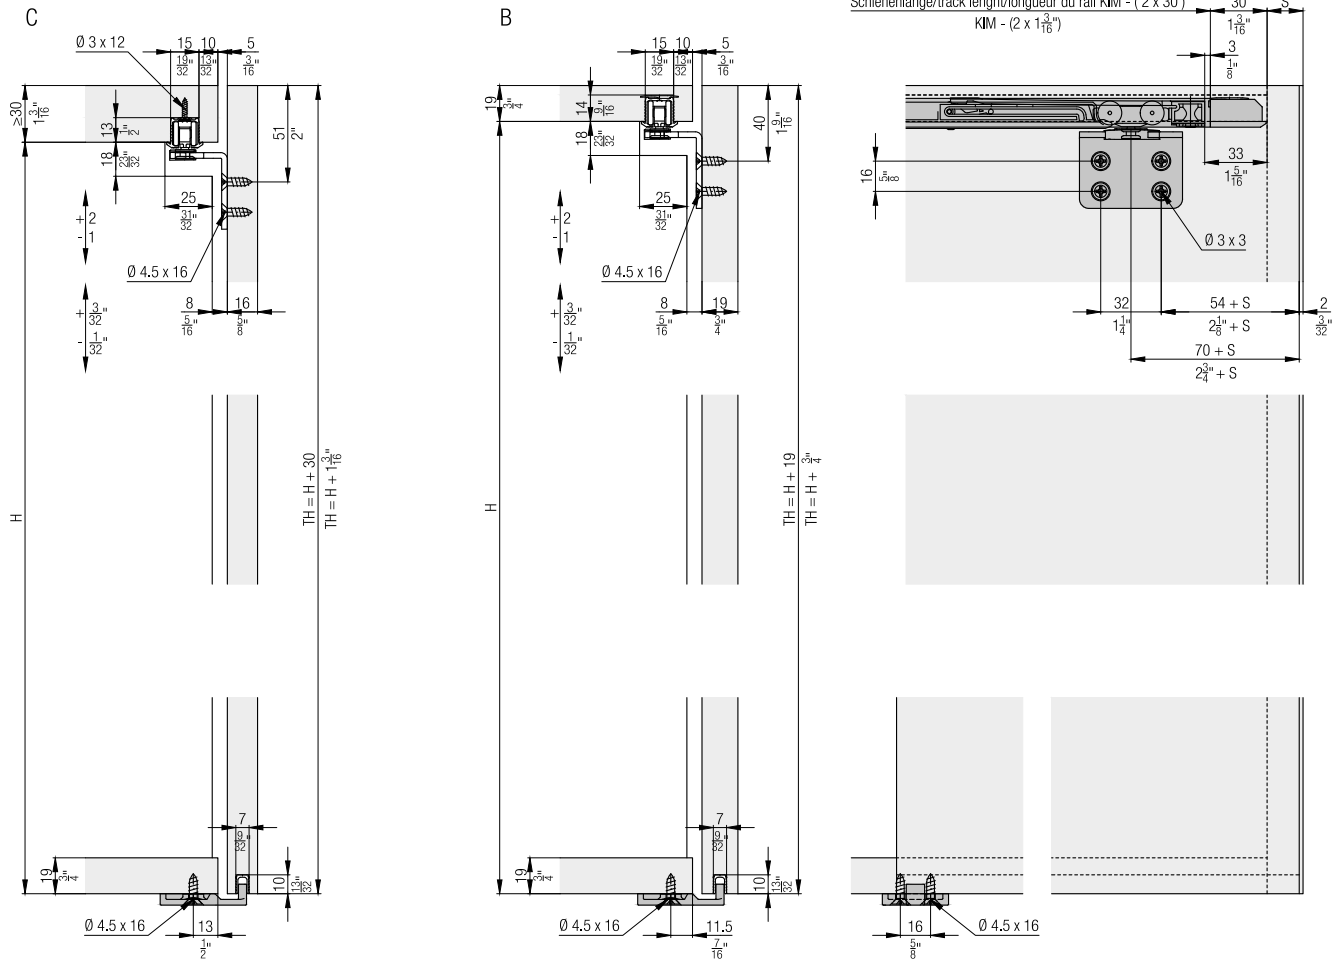




Set for 1 wooden door up to 16 kg (35 lbs.), with height adjustment

	No.
Hawa Clipo 16 H FS, 3-point guide, for 1 door	053.3298.071

Set consisting of:

		053.3298.071	No.
	Running gear, outer door	2	053.3290.172
	Hawa Clipo 16/Hawa Regal 16 C stopper, plastic, gray	2	053.3215.071
	Running gear angle, steel, zinc-plated	2	053.3291.171
	Flat countersunk head chipboard screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated	10	600.0000.478
	Bottom guide, plastic	1	053.3292.001



Running tracks

		mm (inch)	No.
	A: Single running track, for glue fixing, aluminum	2,500 (8' 2 7/16")	053.3229.250
		3,500 (11' 5 25/32")	053.3229.350
		6,000 (19' 8 7/32")	053.3229.600
	B: Single running track, with swivel-lug, aluminum (not for hard wood/MDF)	2,500 (8' 2 7/16")	053.3227.250
		3,500 (11' 5 25/32")	053.3227.350
		6,000 (19' 8 7/32")	053.3227.600
	C: Single running track, aluminum, pre-drilled	2,500 (8' 2 7/16")	053.3225.250
		3,500 (11' 5 25/32")	053.3225.350
		6,000 (19' 8 7/32")	053.3225.600


Track end piece set for single running tracks

	No.
Track end piece, for screw fixing, plastic, gray	053.3210.081
Track end piece, with swivel lug, plastic, gray	053.3211.081

Set consisting of:

		053.3210.081	053.3211.081	No.
	Track-end piece, for screw fixing, plastic, grey	2		053.3210.001
	Track-end piece, with swivel lug, plastic, grey		2	053.3211.071

Guide tracks

		mm (inch)	No.
	Guide track, groove width 7 mm (9/32"), plastic, anthracite	2,500 (8' 2 7/16")	053.3012.250
		3,500 (11' 5 25/32")	053.3012.350
		6,000 (19' 8 7/32")	053.3012.600



Soft close up to 8/16 kg (17/35 lbs.)

	No.
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 8 kg (17 lbs.)	053.3332.071
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 16 kg (35 lbs.)	053.3332.072


Set consisting of:

		053.3332.071	053.3332.072	No.
	Damper, up to 8 kg (17 lbs.)	2		053.3330.071
	Trigger, with stopper	2	2	053.3331.071
	Cross recessed pan head screw, 2.2x8 mm (3/32"x5/16"), steel, zinc-plated	2	2	600.0000.482
	Damper, up to 16 kg (35 lbs.)		2	053.3330.072


Handle profiles

		mm (inch)	No.
	Handle profile, groove for brush seal, for groove mounting, aluminum, anodized, for door thickness of 19 mm (3/4")	2,500 (8' 2 7/16")	056.3028.250
		6,000 (19' 8 7/32")	056.3028.600
	Handle profile, groove for brush seal, for screw fixing, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	055.3140.250
		6,000 (19' 8 7/32")	055.3140.600


Accessories

		No.
	Track cleaner, plastic, red	040.3142.071


Further installation examples

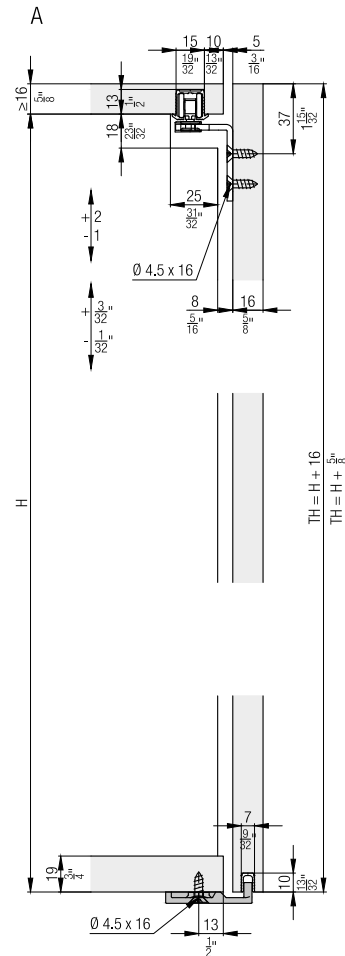

Calculations

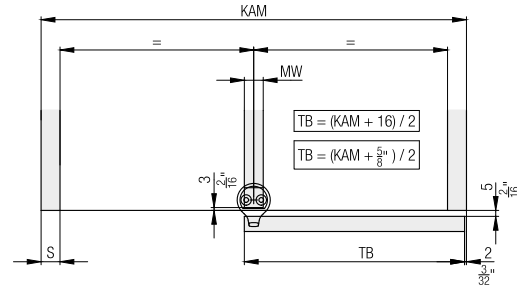


Handle profiles


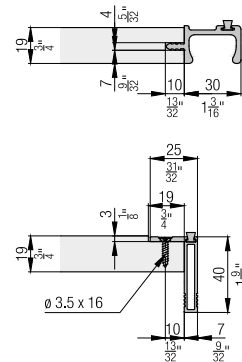


Soft close

	Z ≥	
	1	2
Hawa Clipo 16 H IS	1' 3 3/4"	1' 1 1/8"
Hawa Clipo 16 H MS	1' 5 1/4"	2' 1 1/8"
Hawa Clipo 16 H FS	1' 5 1/4"	2' 1 1/8"
Hawa Clipo 16 HM IS	1' 3 3/4"	1' 1 1/8"
Hawa Clipo 16 GK IS	1' 3 3/4"	1' 1 1/8"
Hawa Clipo 16 GS IS	1' 3 3/4"	1' 1 1/8"
Hawa Clipo 16 GPK IS	1' 3 3/4"	1' 1 1/8"
Hawa Clipo 16 GPPK IS	1' 3 3/4"	1' 1 1/8"

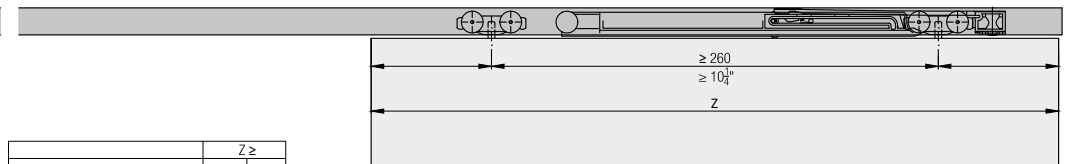

	Z ≥	
	1	2
Hawa Clipo 16 H IS	400	600
Hawa Clipo 16 H MS	438	638
Hawa Clipo 16 H FS	438	638
Hawa Clipo 16 HM IS	400	600
Hawa Clipo 16 GK IS	400	600
Hawa Clipo 16 GS IS	400	600
Hawa Clipo 16 GPK IS	400	600
Hawa Clipo 16 GPPK IS	400	600

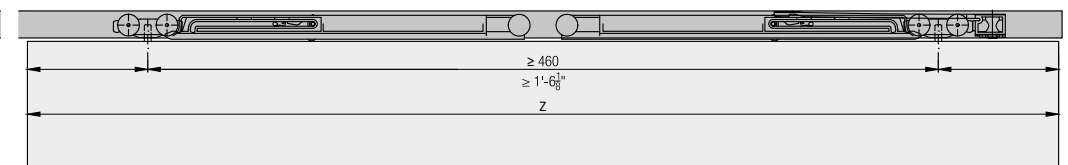

Accessories

– Straightening fitting from page 236

Planning/execution

Further information about the product can be found on www.hawa.com.